

# primer-101 plus

04/21 252




## PRIMER-101 PLUS

Monocomponent acrylic primer in watery dispersion.

**substrate  
preparation**



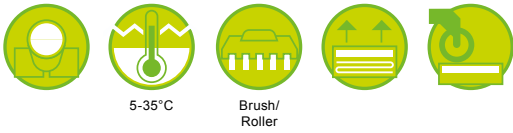

5-35°C

Brush/  
Roller

# primer-101 plus



## APPEARANCE

Pale blue liquid

## STORAGE

12 months in dry place, protected from frost and high temperatures

## FIELDS OF USE

- Adhesion-promoter for class C2 (EN 12004) and self levelling compound.
- Treating surfaces such as: ceramic tiles (glazed bricks, polished stoneware, etc.), stone materials resilient floors perfectly adherent (excluding polyolefin coatings), wood panels, chipboard, compact concrete. For any other type of support, please contact the technical department.
- Treating absorbent<sup>1</sup> or fairly absorbent surfaces, such as: cement-based screeds, gypsum<sup>2</sup>, plasterboard, anhydrite<sup>2</sup>.

<sup>1</sup> Dilute product with water in 1:1 ratio for use on absorbent substrates.

<sup>2</sup> When PRIMER-101 PLUS is applied, the residue humidity in the gypsum-based substrates described above must be less than 0.5%.

## NATURE OF THE PRODUCT

PRIMER-101 PLUS consists of acrylic resins in watery dispersion and specific additives. For further details, ask the technical office for the safety brief or download it from the web site [www.technokolla.com](http://www.technokolla.com).

## APPLICATION

Thoroughly shake the product before use.

Apply a single coat of PRIMER-101 PLUS by brush, flat brush or roller until treated surface has been fully covered. Untreated areas will be easily seen since product is pale blue in colour. Dilute PRIMER-101 PLUS with water in 1:1 ratio for use on absorbent substrates.

Tools used with PRIMER-101 PLUS can be easily cleaned with water while product is still fresh, but once it has set.



## CONSUMPTION

~ 100-150 g/m<sup>2</sup> depending on porosity of substrate

## WARNINGS AND RECOMMENDATIONS

- do not apply to substrates that will subsequently be in contact with water or immersed
- only apply to perfectly dry substrates and free from residues that can reduce adhesion, such as dust, dirt, oil, grease, rust and flaking parts
- do not use as a waterproofer for showers, tubs, etc. Use RASOGUM + or products of RASOLASTIK line
- do not use to reinforce cement-based substrates. Use TC-MAS
- do not apply at temperatures lower than 5°C or higher than 35°C
- in the case of resilient floors, carry out cleaning and sanding; residential application

## TECHNICAL DATA

## VALUE

Appearance	Fluid
Colour	Pale blue
Weight density (g/cm <sup>3</sup> )	~ 1.4
Can be covered	*after 1-3 h

\* these time intervals refer to a temperature of 23°C-50% R.H.. They become shorter with higher temperatures and longer at lower temperatures.

**Technokolla** reminds you to examine the “notes” document that completes the information in this data sheet. The document can be downloaded in the pdf format from the website [www.technokolla.com](http://www.technokolla.com).

The advice about technical matters in the technical data sheets, or given verbally or in writing by our personnel as part of our customer assistance service, is the result of our best and most up to date experience. Since we are unable to personally modify the conditions in the building site or the way the work is carried out, this information is purely indicative and, thus, binds us neither legally nor in any other way in relation third parties. This information does not relieve the end user from being responsible for testing our products so as to make sure they are fit for the required use. We therefore strongly advise the customer/user to subject Technokolla's products to preventive tests in order to ensure that they are suitable. The end user is also responsible for checking to make sure that this technical data sheet is not obsolete and that more recent editions have not replaced it. Thus, before using our products, you are advised to download the most up to date version of the technical data sheet from our web site [www.technokolla.com](http://www.technokolla.com).



### Sika Italia S.p.A.

Registered Office and Administrative Headquarters: Via L. Einaudi 6,  
20068 Peschiera Borromeo (MI)

Sassuolo Plant (MO): Via Radici in Piano 558, Postal Code 41049

Tel: +39 0536 809711 Fax: +39 0536 809729 [www.technokolla.com](http://www.technokolla.com)